

NOTE: Adjusting this one too high could lead to unpleasant results!



## FETTO 11.1 SETTINGS

When opened FETTO has six jumpers (white plastic), four DIP switches (black rectangular) and 2 trimmers (black, circular with a trace).

Thanks to these paraphernalias FETTO offers many tuning options – like a puzzle where the pieces could fit in different combinations. Hopefully this makes it possible for you to find a few favorite sounds for your guitar(s) and amplifier(s). Explanations and a picture is shown below. Thanks for choosing FETTO and good luck!

### Jumpers (Lift to change – mounted on 2 pins=ON):

		(Default)
VOICE	Affects FETTOs "character". ON or OFF is recommended.	(ON)
BASS 1	ON = bass boost 1	(OFF)
BASS 2	ON = bass boost 2	(OFF)
MID CUT	ON = mid cut	(ON)
GAIN 1	ON = gain boost 1 (more distortion)	(ON)
GAIN 2	ON = gain boost 2 (more distortion)	(OFF)

### DIP-switches (use a finger/small screw driver)

		(Default)
1 BRIGHT 1	ON = mid/treble boost for external DRIVE-control	(OFF)
2 BRIGHT 2	ON = mid/treble boost for internal GAIN TRIM.	(OFF)
3 TREBLE CUT 1	ON treble cut 1	(ON)
4 TREBLE CUT 2	ON treble cut 2	(ON)


### Trimmers (use a SMALL screw driver, max 0,5 x 2 mm,)

		(Default)
GAIN TRIM	Fine tuning for gain/distortion. At max (100% clockwise) distortion, and noise, is maximized.	(50%)
TREBLE CUT 3	Fine tuning for treble/out level. At max (100% clockwise) treble/out level is maximized.	(80-100%)

### FETTO printed circuit board (box opened)

Jumper (OFF)  
(Mounted on 1 pin)

**Only change the Default Settings if you really have to. If you break something inside, the warranty is broken too.**

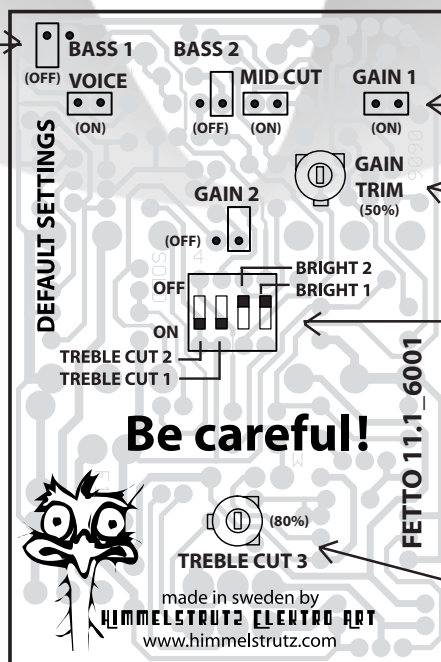

Jumper (ON)  
(Mounted on 2 pins)

Trimmer  
(50% default)

DIP-switches

Trimmer  
(80-100% default)